
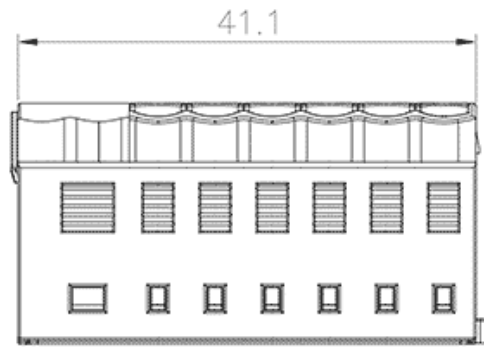


Product Type: Push-in type power distribution block

Product Name:TPA6-2.5-13-GY-Input

Product Description: Connection method:Push-in connection, Rated Current:41A, Rated Voltage:450V, Number of connections : 13, Number of levels : 1, Cross section:0.5-10mm², AWG:20-8AWG

Product Size

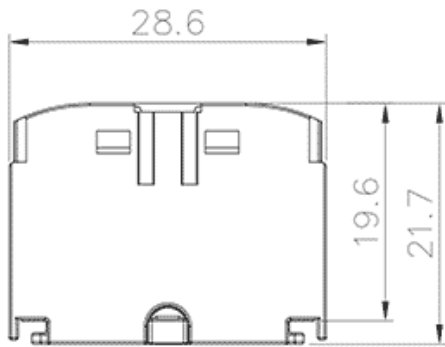

Parameters

| | |
|--------------------|----------------|
| ⌘ SUPU ID | TPA6/2.5-13-GY |
| ⌘ Number of levels | 1 |

| | |
|--------------------------------------------|--------------------|
| ☞ Number of connections | 13 |
| ☞ Connection method | Push-in connection |
| ☞ Protection Level | IP20 |
| ☞ Insulation material | PA66 |
| ☞ Insulation material group | I |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Sn,Plated |
| ☞ Ambient temperature (operation) | -40°C~105°C |
| ☞ Ambient temperature (assembly) | -5°C~70°C |
| ☞ Ambient temperature (storage) | -25°C~60°C |
| ☞ Permissible humidity (storage/transport) | 30%~70% |
| ☞ Potentials | 1 |

Technical data

| | |
|-------------------------------------------------|-----------------------|
| ☞ IEC Rated Current | 41A |
| ☞ IEC Rated Voltage | 450V |
| ☞ Overvoltage category | III |
| ☞ Degree of pollution | 3 |
| ☞ Rated impulse voltage | 6KV |
| ☞ UL Rated Current | 50A |
| ☞ UL Rated Voltage | 300V |
| ☞ Conductor cross section rigid | 0.5-10mm ² |
| ☞ Conductor cross section flexible | 0.5-6mm ² |
| ☞ Conductor cross section flexible,with furrule | 0.5-6mm ² |

| | |
|-----------------------|---------|
| ☞ Stripping length | 10-12mm |
| ☞ Use group | B/C |
| ☞ Rated cross section | 20-8AWG |

Commercial data

| | |
|------------|----------------|
| ☞ Order No | TPA6/2.5-13-GY |
|------------|----------------|

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat