Product Type: Compact intermediate relay

Product Name:RET-230AC-2C

Product Description: Compact industrial relay，2transfer contact 230VAC/ 8A,Test button

Product Size

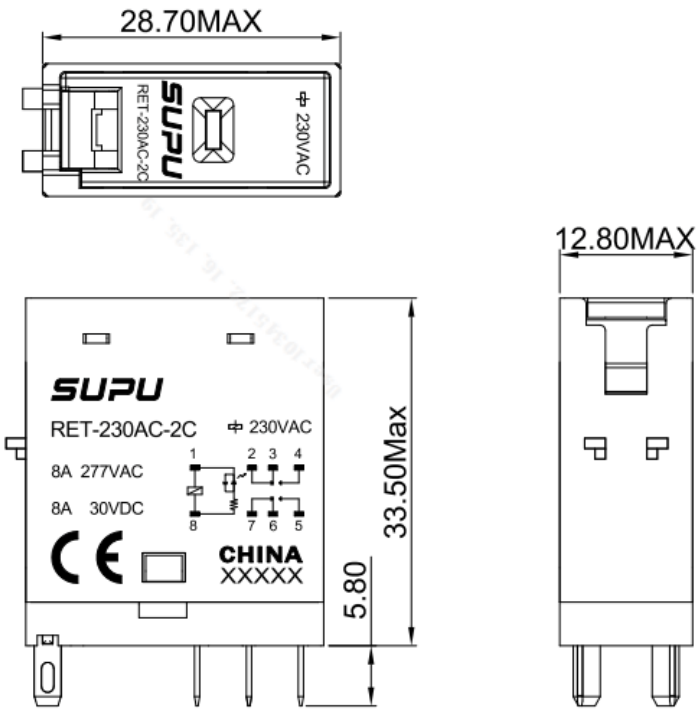

Parameters

SUPU ID	RET-230AC-2C
Protection Level	IP40

Ambient temperature (operation)	-25~+55°C
Ambient temperature (storage)	-40~+70°C
Mounting Type	optional
Contact material	silver alloy
Connection method	Push in connection
Contact connection type	2C

Technical data

IEC Rated Voltage	230AC
Overvoltage category	II
Degree of pollution	2
Insulation Resistance	1000MΩ（500VDC）
Dielectric withstand voltage	5000VAC 1min：Coils/ contacts 1000VAC 1min：BetweenContacts 3000VAC 8min：BetweenContacts
Endurance	Mechanical 20 million cycles or more Electrical over 100,000 cycles
Operating voltage	≤75% of rated voltage
Release Voltage	≥10% of rated voltage
Maximum permissible voltage	130% of rated voltage
Nominal power consumption	About1.1~1.4VA
Response time	15ms or less
Release time	20ms or less
Protective circuit	None
Status display	visual
Maximum switching power	2200VA/240W

Rated load capacity	AC277V/8A DC30V/8A
Rated load current	8A

Commercial data

Order No	RET-230AC-2C
Packing unit	20
Minimum order quantity	20
Single piece weight	19g

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.