




Product Type: Din rail power supply

**Product Name: SDD-24DC2-20**

Product Description: Dual channel 24V input, support 1+1 and N+1 redundancy system, output current up to 20A

Product Size

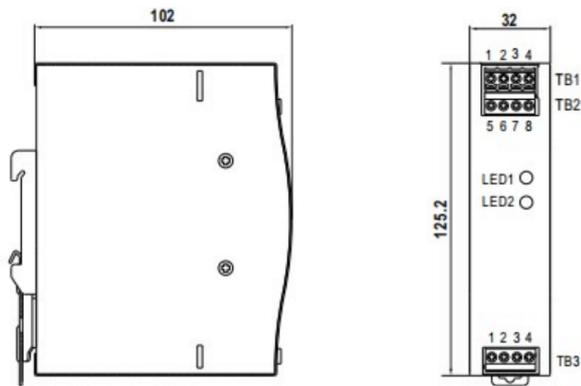

## Parameters

☞ SUPU ID

SDD-24DC2-20

☞ Protection Level

IP20

☞ Operating temperature range

-40~+80°C

|                  |                                |
|------------------|--------------------------------|
| ☞ Terminal block | MC-TD5.08H03C-0001 MC-5.08A04C |
| ☞ DC OK          | Yes                            |
| ☞ Dimensions(mm) | 125.2*32*102                   |

## Technical data

|                     |                            |
|---------------------|----------------------------|
| ☞ IEC Rated Current | 0-20A continue             |
| ☞ IEC Rated Voltage | DC : 24V                   |
| ☞ Nominal input     | DC                         |
| ☞ Efficiency        | 98%                        |
| ☞ Ripple noise      | ","                        |
| ☞ Input frequency   | ","IP/OP-Housings:0.5KVac; |

## Commercial data

|                          |              |
|--------------------------|--------------|
| ☞ Order No               | SDD-24DC2-20 |
| ☞ Packing unit           | PCS          |
| ☞ Minimum order quantity | 1            |
| ☞ Single piece weight    | 0.35KG       |

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2026-04-25 22:41

The right to modify data belongs to SUPU.