




Product Type: IP67 connector


Product Name:ESF-RS200A50YL

Product Description:

Product Size

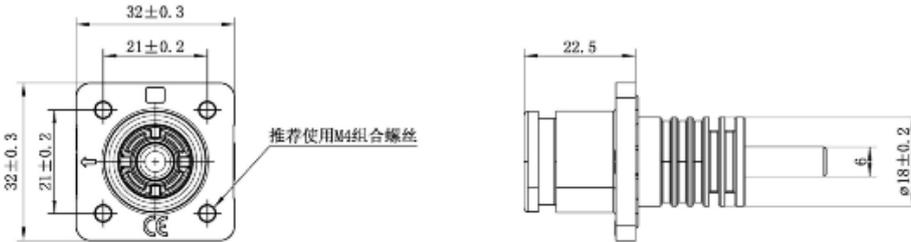

插座除键槽及类型标识不同外，其它结构均相同



订货号	物料名称	插座键槽	coding	备注
ESF-RS200A50YL	ESF-RS200A50YL 插座		无	橙色
ESF-RS200A50BL	ESF-RS200A50BL 插座			黑色
ESF-RS200A50YL-AQ	ESF-RS200A50YL-AQ 插座		A:20° Q:90°	橙色
ESF-RS200A50BL-AQ	ESF-RS200A50BL-AQ 插座			黑色
ESF-RS200A50YL-BS	ESF-RS200A50YL-BS 插座		B:30° S:180°	橙色
ESF-RS200A50BL-BS	ESF-RS200A50BL-BS 插座			黑色

Parameters

☞ SUPU ID	ESF-RS200A50YL
☞ Number of connections	1
☞ Connection method	Screw thread
☞ Protection Level	IP67

⌘ Operating temperature range	-40°C~125°C
⌘ Insulation material	PA
⌘ Insulation material group	III
⌘ Contact material	Copper alloy
⌘ Contact plating	Ag,Plated
⌘ Insertion/withdrawal cycles	100
⌘ Insertion force	≤75N
⌘ Withdrawal force	≥10N

## Technical data

⌘ IEC Rated Current	200A
⌘ IEC Rated Voltage	1500V
⌘ Overvoltage category	III
⌘ Degree of pollution	3
⌘ Rated impulse voltage	12.3KV
⌘ UL Rated Current	50mm <sup>2</sup> (AWG1/0)
⌘ UL Rated Voltage	Positive
⌘ Stripping length	/
⌘ Rated cross section	50mm <sup>2</sup> (AWG1/0)
⌘ Rated cross section(AWG)	50mm <sup>2</sup> (AWG1/0) 35mm <sup>2</sup> (AWG2)
⌘ External cable diameter	/

## Commercial data

⌘ Order No	ESF-RS200A50YL
------------	----------------

☞ Packing unit	1
☞ Minimum order quantity	PCS
☞ Weight per unit (without packaging)	0.047KG
☞ Single piece weight	0.045KG

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat