


Product Description: Pitch: 5.0mm Rated
Voltage : 320V Rated Current: 18A
colour : customizable

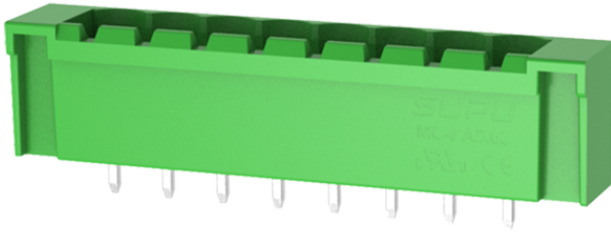

Technical drawings of the PCB layout for the 10-pin connector. The top drawing is a side view showing dimensions: 3.50±0.30, 3.80, 1.00, 12.00, and 8.45. The middle drawing is a top view showing dimensions: 7.50, 5.00, 5.0x(P-1), and 5.0x(P-1)+7. The bottom drawing is a detailed PCB layout showing dimensions: 5.00, 7.50, 5.00, 5.0x(P-1), 8.45, 3.80, and hole diameters of 1.40 and 2.40.

⌘ SUPU ID	MC-PA5.0V22-I-0002
⌘ Pitch	5
⌘ Number of levels	Single layer
⌘ Number of connections	22

☞ Connection method	-
☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Color	Green/Black/Blue/Grey/Orange/Red

Technical data

☞ IEC Rated Current	320V
☞ IEC Rated Voltage	18A
☞ Overvoltage category	III III II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	4.0KV 4.0KV 4.0KV
☞ UL Rated Current	15A - 10A
☞ UL Rated Voltage	300V - 300V
☞ Conductor cross section rigid	-
☞ Conductor cross section flexible	-
☞ Conductor cross section flexible,with furrule	-
☞ Locking screw Specification	-
☞ Locking screw torque	-
☞ Fixed Screw Specification	-
☞ 固定螺钉扭矩	-

☞ Stripping length	-
☞ Use group	B/C/D
☞ Rated cross section	-

Commercial data

☞ Order No	MC-PA5.0V22-I-0002
------------	--------------------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat