


Product Type: Fixed terminal

## Product Name:MC-TC-B10.0VXXP-0001

Product Description: Pitch:10.0mm Rated Voltage : 1000V Rated Current:76A Connection method : Push in connection colour : customizable

### Product Size

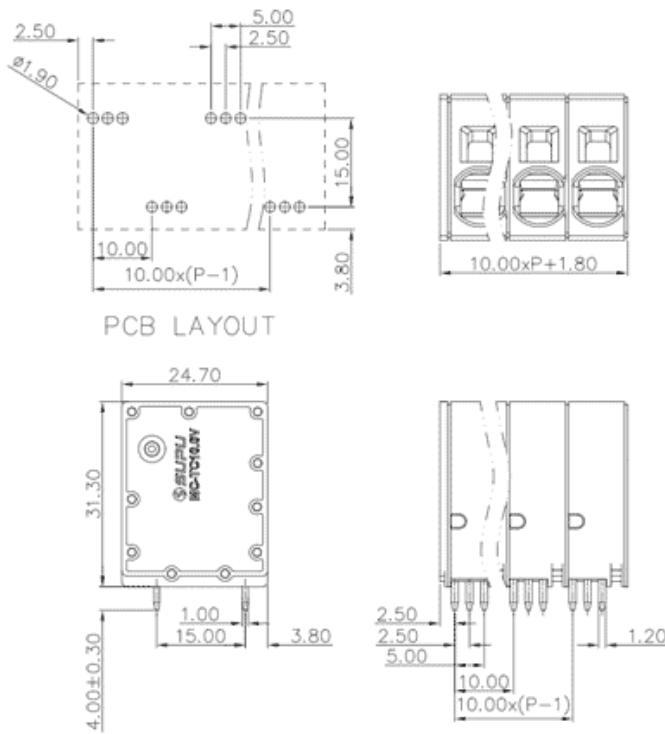

### Parameters

⌘ SUPU ID	MC-TC-B10.0VXXP-0001
⌘ Pitch	10
⌘ Number of levels	Single layer
⌘ Number of connections	XX

☞ Connection method	Push in spring connection
☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

☞ IEC Rated Current	76A
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III/III/ II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	8.0KV 8.0KV 8.0KV
☞ UL Rated Current	70A 70A 5A
☞ UL Rated Voltage	600V 600V 600V
☞ Conductor cross section rigid	0.75-16.0mm <sup>2</sup>
☞ Conductor cross section flexible	0.75-16.0mm <sup>2</sup>
☞ Conductor cross section flexible,with furrule	0.75-16.0mm <sup>2</sup>
☞ Locking screw Specification	-
☞ Locking screw torque	-
☞ Fixed Screw Specification	-
☞ 固定螺钉扭矩	-

☞ Stripping length	18-20mm
☞ Use group	B/C/D
☞ Rated cross section	20-4AWG

## Commercial data

☞ Order No	MC-TC-B10.0VXXP-0001
------------	----------------------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat