


Product Type: Fixed terminal

Product Name:MC-DTE5.08H28C-0001

Product Description: Pitch:5.08mm Rated Voltage : 320V Rated Current:17.5A Connection method : Screw connection colour : customizable

### Product Size

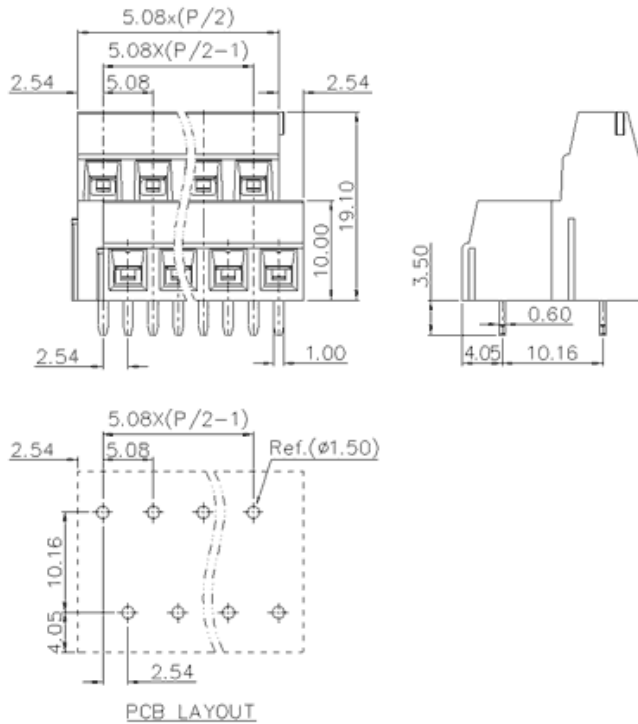

### Parameters

⌘ SUPU ID	MC-DTE5.08H28C-0001
⌘ Pitch	5.08
⌘ Number of levels	Multi-Layer
⌘ Number of connections	28

Connection method	Screw connection
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

IEC Rated Current	17.5A
IEC Rated Voltage	320V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	4.0KV 4.0KV 4.0KV
UL Rated Current	13.5A - 10A
UL Rated Voltage	300V - 300V
Conductor cross section rigid	0.2~1.5mm <sup>2</sup>
Conductor cross section flexible	0.2~1.5mm <sup>2</sup>
Conductor cross section flexible,with furrule	0.2~1.5mm <sup>2</sup>
Locking screw Specification	M3
Locking screw torque	0.5N.m
Fixed Screw Specification	-
Stripping length	6-7mm

Order No

MC-DTE5.08H28C-0001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat