



Product Type: Plug-in terminal-Plug

Product Name:MC-RJC3.5H15P-OG-WD


Product Description: Pitch:3.5mm Rated

Voltage : 160V Rated Current:10A Connection

method : Push in connection

colour : customizable

## Product Size

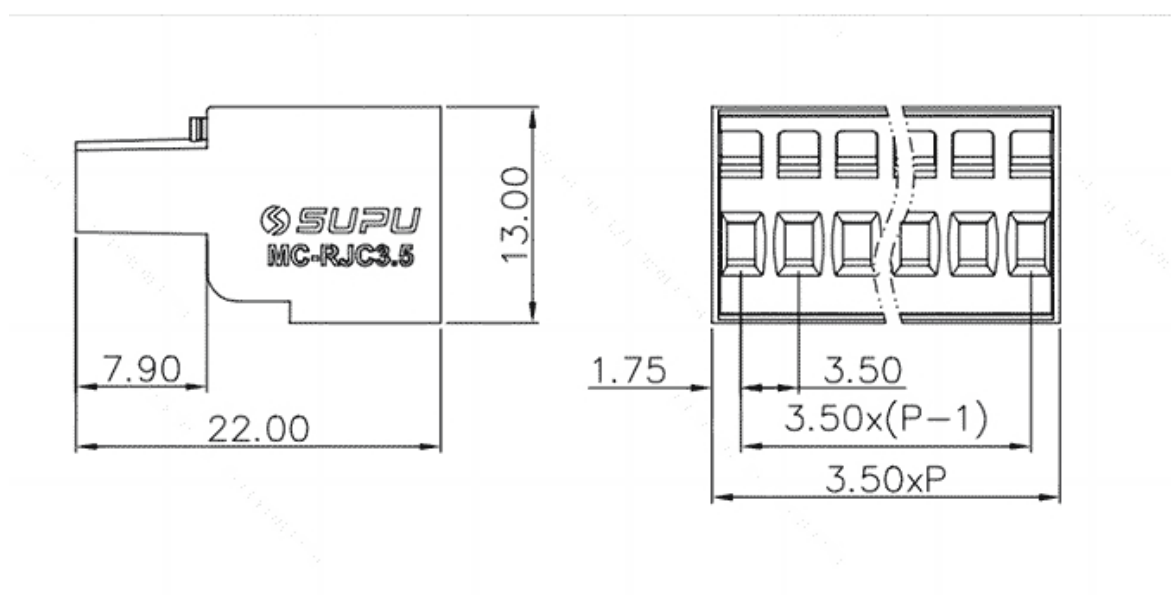

## Parameters

|                                                                                                          |                     |
|----------------------------------------------------------------------------------------------------------|---------------------|
|  SUPU ID               | MC-RJC3.5H15P-OG-WD |
|  Pitch                 | 3.5                 |
|  Number of levels      | single layer        |
|  Number of connections | 15                  |

|                               |                                  |
|-------------------------------|----------------------------------|
| ☞ Connection method           | Push in connection               |
| ☞ Protection Level            | IP20                             |
| ☞ Operating temperature range | -40~+105°C                       |
| ☞ Insulation material         | PA66                             |
| ☞ Insulation material group   | I                                |
| ☞ Contact material            | Copper alloy                     |
| ☞ Contact plating             | Sn,Plated                        |
| ☞ Color                       | Green/Black/Blue/Grey/Orange/Red |

## Technical data

|                                    |                        |
|------------------------------------|------------------------|
| ☞ IEC Rated Current                | 10A                    |
| ☞ IEC Rated Voltage                | 160V                   |
| ☞ Overvoltage category             | III/III/ II            |
| ☞ Degree of pollution              | 3 2 2                  |
| ☞ Rated impulse voltage            | 2.5KV 2.5KV 2.5KV      |
| ☞ UL Rated Current                 | 10A - 10A              |
| ☞ UL Rated Voltage                 | 300V - 300V            |
| ☞ Conductor cross section rigid    | 0.2-1.5mm <sup>2</sup> |
| ☞ Conductor cross section flexible | 0.2-1.5mm <sup>2</sup> |
| ☞ Stripping length                 | 10-11mm                |
| ☞ Use group                        | B/C/D                  |
| ☞ Rated cross section              | 28-16AWG               |

## Commercial data

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat